

SY155W

**SANY**

Quality Changes the World



# READY FOR ANY TERRAIN

PRECISE POWER. CONSTANT RELIABILITY.

CONSTRUCTION MACHINERY



**MOBILE EXCAVATOR**  
**SY155W**

Engine  
DEUTZ TCD4.1 L4  
Rated Power  
115 kW / 2000 rpm  
Bucket capacity  
0.6 m<sup>3</sup>  
Operating mass  
15 000 kg

# SANY

## For challenging tasks, you need a first-class partner

Quality comes from experience. And from new ideas. This is why we combine these two crucial factors at SANY. This is because we are one of the world's leading producers, having sold more than **250 000** excavators in **10 years**. This means that you can always rely on sophisticated products that have been tried and tested in practice. An impressive **5–7%** of our annual turnover is dedicated to research and development. This is why we give you not only our word, but also our extraordinary **five-year warranty** as a guarantee of how powerful and robust our products are.

**250 000**  
EXCAVATORS SOLD IN  
**10 YEARS**

**5–7%**  
TURNOVER FOR RESEARCH  
AND DEVELOPMENT

**FIVE-YEAR  
WARRANTY\***

Quality Changes the World


### SY155W HARD FACTS

Max. bucket digging force  
87 kN (ISO)

Max. arm digging force  
64 kN (ISO)

Swingspeed  
10.5 rpm

Max. travel speed  
20 km/h

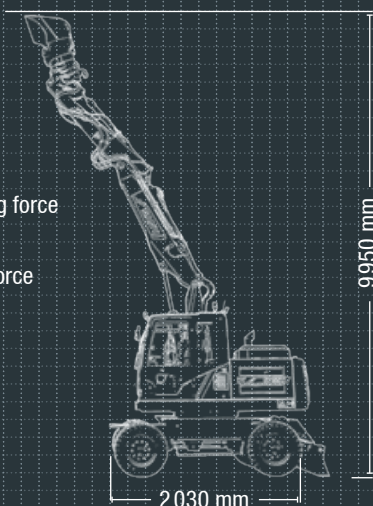


## MOBILE VERSATILITY RE-DEFINED

When it comes to mobility, SANY SY155W is unrivalled, both on the construction site and over short distances from one construction site to the next. There is therefore no need for an additional means of transport, thereby eliminating loading time. This means that the mobile excavator

requires considerably less time and personnel. This is ideal for inner-city areas and a wide variety of applications, from civil engineering and earth moving to pipe laying. It can even demonstrate its strengths in garden- and landscaping work.



\* Applicable in certain markets, please check with your local dealer.

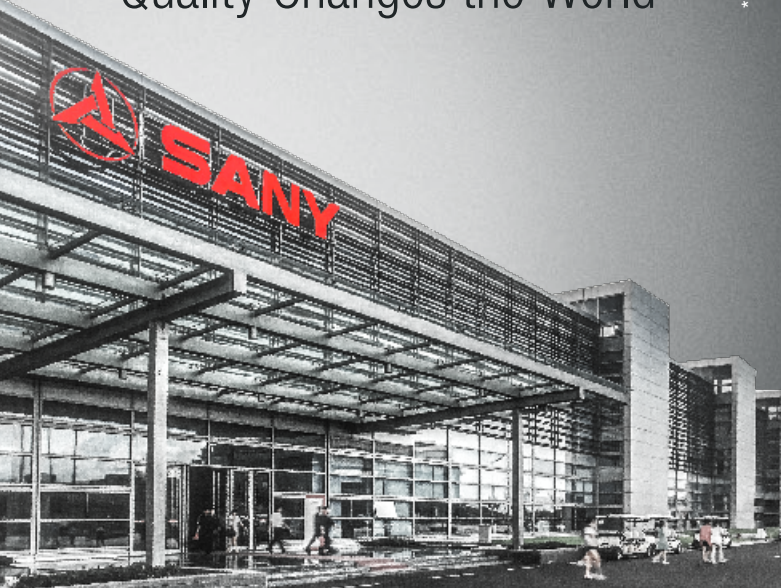

ECONOMY

# A MOBILE POWERHOUSE

When you need an excavator that can change locations quickly, the SY155W is the perfect choice. It lives up to its name as a mobile excavator– not only on the construction site when going from one task to the next, but also over short distances between two construction sites, meaning there is no need for an additional means of transport. This makes it ideally suited for use in urban areas, where it comes into its own thanks to its compact dimensions.

QUALITY

**For the toughest conditions –** Pin point welded seams, executed by highly-precise welding robots, ensure stability and power in the long term.

DIMENSIONS

**Extremely agile –** The two-piece boom enhances its flexibility and reach even with compact dimensions. Even when excavating vertically with attachments or workpieces, the excavator can work with particular precision in tight spaces.

USER EXPERIENCE

**Comfortable all-round –** With its modern interior, the cab provides the best conditions for concentrated and productive work.

SAFETY

**Protection for both people and machines –** From its stable, non-slip hand rails to its large mirrors and camera, the safety package ensures that your construction site runs without a hitch every day.

COMPONENTS

**Inner values–** With the SY155W, quality is guaranteed right down to the fine details – from the ZF gearbox and the Bosch Rexroth hydraulics to the Deutz engine.

ECONOMY

**Price and performance –** The SY155W offers an impressive price-performance ratio that quickly pays off. On every construction site, the compact all-rounder shows what true cost-effectiveness looks like.

DIMENSIONS

### Manoeuvrability and flexibility

The SY155W's two-piece boom broadens the scope of application and increases operational flexibility. This boom enables the work area to be adapted according to your requirements, from a longer distance to close up. It is now also possible to lift loads vertically in the immediate vicinity of adjoining buildings. Naturally, all transport dimensions have been maintained, so that the machine can move with road traffic easily and safely. In combination with its large steering angle, the machine can always be brought perfectly to its working position on the construction site.

### Absolute reliability – for peace of mind!

SANY's five-year warranty\* gives you the assurance that you can fully count on your equipment.




\* With participating partners

DIMENSIONS

### Stability in every situation

The robust undercarriage ensures stable driving and guarantees exact and fast manoeuvring on the construction site. Its stability and high-quality design allow it to prove its strength safely, for example during excavation work. Where necessary, the dozer blade provides additional stability. Naturally, the machine also has stabilisers on its axes, increasing the tilt stability even when working over the sides.

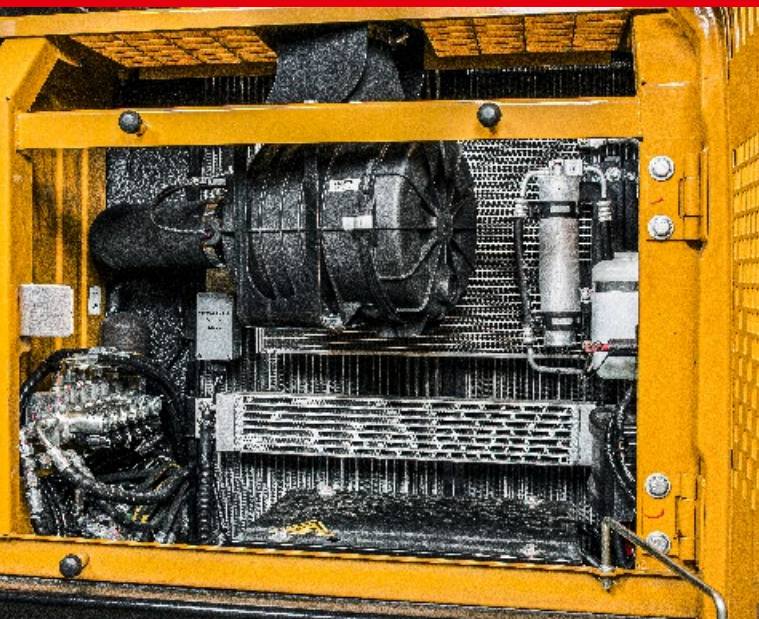

USER EXPERIENCE

**With built-in maintenance benefits**

We can't change the fact that machines need maintenance. That's why we've reduced maintenance requirements, resulting in less downtime. The maintenance-friendly overall concept of the SY155W starts with the robust, wide-opening engine bonnet and the easy accessibility of all relevant components. The filter, radiator and battery are arranged centrally and can therefore be accessed easily and quickly. This guarantees not only full performance and reliability, but also the long service life of all components.



USER EXPERIENCE

**A comfortable working environment**

The cabin of the SY155W has only one task – to make working on the construction site as pleasant, comfortable and safe as possible for the driver. The ergonomically positioned controls and the comfortable, air-suspension driver's seat with numerous individual adjustment options are part of this. The automatic climate control and powerful ventilation and heating ensure that the temperature and fresh air levels in the cab are always perfect. A radio and large storage compartments are also supplied on board as standard. Naturally, the direction of travel can be changed easily using a switch integrated into the joystick.

USER EXPERIENCE

**CONTROL  
FULL POWER  
WITH  
SENSITIVITY**

All of the important controls on the SY155W are positioned perfectly throughout the cab. From the easy to use joystick control to the large multifunction display, on which all important data is clearly laid out in a simple system. The menu navigation is extremely user-friendly and enables the driver to manage machine functions safely and comfortably, for example, checking current pressure levels. The monitor also displays the next inspection due and basic data such as oil and cooling water temperatures and torque. Changing attachment devices is particularly easy; the quick changeover can also be directly selected in the system. The angle of the steering column can also be comfortably adjusted.



**Our highlights – the added benefits SANY offers you:**

- + Two-piece boom
- + Comfortable air-suspension seat
- + Modern LED lighting
- + Clear instruments and a large, high-resolution colour display
- + High safety standards (support cylinders on the axes, camera etc.)
- + Large storage compartments



QUALITY

**Protecting all that's important to you**

The foundation of the SANY excavator's durability and robustness is its sophisticated design and selected high-quality materials. And, of course, its robust build. The welded seams, for instance, are executed by robots with a high degree of precision. This guarantees maximum load-bearing capacity and a long service life.

You can always rely on a clean, well thought-out hydraulic system.

SAFETY

**Everything within reach and in sight**

All the controls are clear and positioned directly within the driver's reach. This ensures not only optimum comfort, but also maximum safety thanks to precise operation. In addition, the driver has a complete overview of the working and slewing area in all situations. The cleverly built cab structure ensures this excellent overview, in conjunction with the camera supplied as standard.



ENGINE

|                   |                                                      |
|-------------------|------------------------------------------------------|
| Model             | DEUTZ TCD4.1 L4                                      |
| Typ               | Water-cooled, 4 cylinder, with commonrail and Adblue |
| Exhaust emissions | Stage V                                              |
| Rated power       | 115 kW / 2 000 rpm                                   |
| Max. torque       | 609 Nm / 1 600 rpm                                   |
| Displacement      | 4 038 ccm                                            |
| Batteries         | 2 × 12V / 120 Ah                                     |

SERVICE REFILL CAPACITIES

|                    |        |
|--------------------|--------|
| Fuel tank          | 233 l  |
| Engine coolant     | 26 l   |
| Engine oil         | 11.5 l |
| Adblue             | 20 l   |
| Hydraulic oil tank | 140 l  |

PERFORMANCE

|                          |                           |
|--------------------------|---------------------------|
| Swingspeed               | 10.5 rpm                  |
| Max. travel speed        | High 20 km/h, slow 7 km/h |
| Max. travel force        | 84 kN                     |
| Gradeability             | 35°                       |
| Bucket capacity          | 0.6 m³                    |
| Groundpressure           | 0.38 / 0.55 kg/cm²        |
| Bucket digging force ISO | 87 kN                     |
| Arm digging force ISO    | 64 kN                     |

RELIEF VALVE SETTINGS

|                   |         |
|-------------------|---------|
| Implement circuit | 320 bar |
| Swing circuit     | 250 bar |
| Travle circuit    | 360 bar |
| Pilot pressure    | 39 bar  |

HYDRAULIC SYSTEM

|                      |                                                   |
|----------------------|---------------------------------------------------|
| Mainpump             | 1 x variable-piston-pump with loadsensing control |
| Max. oilflow         | 250 l/min                                         |
| Max. oilflow (AUX 1) | 100 l/min                                         |
| Max. oilflow (AUX 2) | 100 l/min                                         |
| Travelmotor          | Variable displacement axial piston motor          |
| Swingmotor           | Axial piston motor                                |

UNDER AND UPPER STRUCTURE

|                 |                                                                                                    |
|-----------------|----------------------------------------------------------------------------------------------------|
| Boom length     | 1 930 mm + 3 100 mm                                                                                |
| Arm length      | 2 500 mm                                                                                           |
| Rotation device | Planetary gear reducer driven by an axial piston motor, automatic hydraulic released slewing brake |

OPERATING MASS

|        |           |
|--------|-----------|
| SY155W | 15 000 kg |
|--------|-----------|

TIRES

|            |                   |
|------------|-------------------|
| Dimensions | 10.00 - 20 - 16PR |
|------------|-------------------|



LIFTING CAPACITIES OF LOWER DOZER BLADE


| Load point heigh | Radius |       |       |       | Digging reach max. |      |      |
|------------------|--------|-------|-------|-------|--------------------|------|------|
|                  | 3.0 m  | 4.5 m | 6.0 m | 7.5 m | mm                 | mm   | mm   |
| 7,5 m kg         |        | 3600  | 3600  |       | 3005               | 3100 | 4952 |
| 6,0 m kg         |        | 3400  | 3400  | 3500  | 2300               | 3300 | 2100 |
| 4,5 m kg         |        | 4000  | 3600  | 3600  | 2300               | 2800 | 1700 |
| 3,0 m kg         | 6700   | 6300  | 5000  | 3400  | 3600               | 2200 | 2500 |
| 1,5 m kg         | 9200   | 5800  | 5300  | 3100  | 3400               | 2100 | 2500 |
| Ground line kg   | 9600   | 5400  | 5100  | 2900  | 3400               | 2000 | 2500 |
| -1,5 m kg        | 9600   | 5400  | 5100  | 2900  | 3300               | 2000 | 2800 |
| -3,0 m kg        | 8900   | 5700  | 5200  | 3000  |                    |      | 6806 |

LIFTING CAPACITIES OF UPPER DOZER BLADE

| Load point heigh | Radius |       |       |       | Digging reach max. |      |      |
|------------------|--------|-------|-------|-------|--------------------|------|------|
|                  | 3.0 m  | 4.5 m | 6.0 m | 7.5 m | mm                 | mm   | mm   |
| 7,5 m kg         |        | 3600  | 3600  |       | 3400               | 3100 | 4952 |
| 6,0 m kg         |        | 3400  | 3400  | 2500  | 2300               | 2300 | 2100 |
| 4,5 m kg         |        | 4000  | 3600  | 2500  | 2300               | 1800 | 1700 |
| 3,0 m kg         | 6700   | 6300  | 3700  | 3400  | 2500               | 2200 | 1700 |
| 1,5 m kg         | 6500   | 5800  | 3500  | 3100  | 2300               | 2100 | 1700 |
| Ground line kg   | 6200   | 5400  | 3400  | 2900  | 2300               | 2000 | 1700 |
| -1,5 m kg        | 6300   | 5400  | 3300  | 2900  | 2200               | 2000 | 1900 |
| -3,0 m kg        | 6500   | 5700  | 3400  | 3000  |                    |      | 6806 |


DIMENSIONS

|    |                               |          |
|----|-------------------------------|----------|
| A  | Transport length              | 7 500 mm |
| A  | Transport length in drivemode | 6 224 mm |
| B  | Transport width               | 2 550 mm |
| C  | Upperstructure width          | 2 550 mm |
| D  | Height over cab               | 3 200 mm |
| E  | Transport height              | 3 200 mm |
| E' | Transport height in drivemode | 3 996 mm |
| F  | Tail length                   | 2 030 mm |
| G  | Track gauge                   | 1 944 mm |
| H  | Undercarriage width (blade)   | 2 550 mm |
| I  | Horizontal distance to blade  | 2 200 mm |
| J  | Blade height                  | 600 mm   |
| K  | Minimum ground clearance      | 360 mm   |
| L  | Counterweight clearance       | 1 230 mm |
| M  | Engine cover height           | 2 616 mm |
| N  | Tail swing radius             | 2 030 mm |
| O  | Center distance of tumblers   | 1 944 mm |

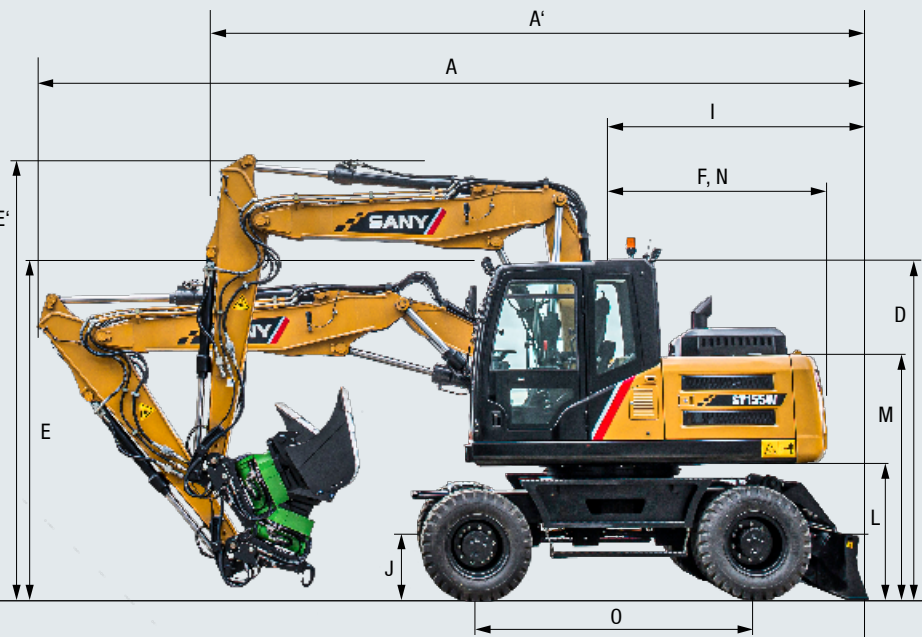

OPERATING RANGE

|   |                                              |          |
|---|----------------------------------------------|----------|
| A | Max. digging reach                           | 8 900 mm |
| B | Max. digging depth                           | 5 400 mm |
| C | Max. digging height                          | 9 950 mm |
| D | Max. dumping height                          | 7 200 mm |
| E | Min. dumping height                          | 2 920 mm |
| F | Max. vertical digging depth                  | 4 500 mm |
| G | Overall height over arm by Min. swing radius | 7 324 mm |
| H | Min. swing radius                            | 2 195 mm |
| I | Max. clearance when blade up                 | 472 mm   |
| J | Max. depth of blade down                     | 167 mm   |

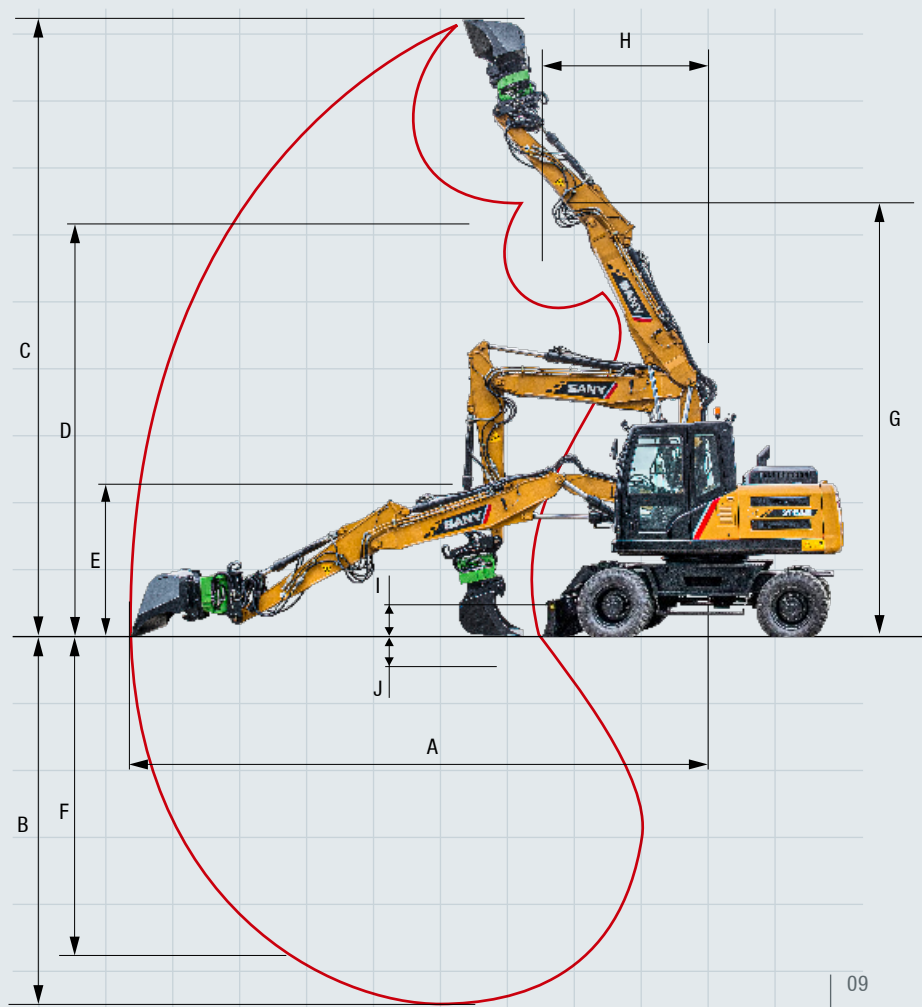

Ready for any challenge

Its extensive standard equipment makes the SY155W a perfect partner to tackle everyday challenges on the construction site. Optional extra equipment and attachment devices are also available to increase its flexibility even more.



OPERATORS COMFORT / CABINE

|                                |   |
|--------------------------------|---|
| Airsuspension seat             | ● |
| Heater                         | ● |
| Automatic air conditioning C/H | ● |
| Radio and speaker              | ● |
| Armrests (adjustable)          | ● |
| 12v outlets                    | ● |
| AUX 1 on Joystick              | ● |
| AUX 2 on Joystick              | ● |
| Integrated cooling box         | ● |
| Adjustable steering column     | ● |

WORKING EQUIPMENT

|                                                               |   |
|---------------------------------------------------------------|---|
| Boom and arm load holding valves with overload indicator      | ● |
| Double acting circuit for hydraulic quick coupler with piping | ● |
| Breaker&Shear line proportional on Joystick with piping       | ● |
| Rotation line proportional on Joystick with piping            | ● |
| Flow adjustment for attachments                               | ● |
| Changeover of bucket cylinder prepared                        | ● |
| Two-piece boom                                                | ● |
| Dozer blade                                                   | ● |

UNDERCARRIAGE

|                        |   |
|------------------------|---|
| Holes/loops for fixing | ● |
| Toolbox                | ● |

Standard equipment ● Special option ●

The standard and special options differ depending on the country in which the compact excavator is delivered. If you have any questions, please contact your dealer directly.

SAFETY

|                       |   |
|-----------------------|---|
| Battery master switch | ● |
| Travel Alarm          | ● |
| Warning beacon        | ● |
| Camera                | ● |
| Lockable hoods        | ● |

WORKING LIGHTS

|                         |   |
|-------------------------|---|
| Lights - front (LED)    | ● |
| Lights - boom (LED)     | ● |
| Lights - platform (LED) | ● |
| Lights - back (LED)     | ● |

ENGINE

|               |   |
|---------------|---|
| Auto idle     | ● |
| DOC           | ● |
| DPF           | ● |
| Diesel filter | ● |

HYDRAULIC SYSTEM

|                                                |   |
|------------------------------------------------|---|
| Axle stabilizers                               | ● |
| piping for additional hydraulic function AUX 1 | ● |
| piping for additional hydraulic function AUX 2 | ● |
| Swing brake                                    | ● |
| Mainfilter                                     | ● |

A SERVICE YOU CAN RELY ON

Just as we do with our excavators, we also demand high quality and reliability of our service products. This underlines our equipment's performance in terms of their durability and their excellent price-performance ratio. After all, maintenance is crucial

for efficiency, cost-effectiveness and safety. Your SANY dealer is happy to help you with a comprehensive range of services to ensure that your machine continues operating efficiently in the long term.

SANY – flexible, fast and always there for you

Rapid assistance, tailored advice and a reliable supply of original parts – that is what we mean by a premium service.



The added benefits SANY offers you:

- + Fast supply thanks to the central warehouse near Cologne
- + More than 15,000 spare parts to make your machine highly reliable
- + Expert knowledge for optimal supply for your machine
- + Thanks to SANY's special training programme, our dealers are always kept up-to-date so that they can face all technical challenges.



Parts supply – quick and reliable

With the purchase of a SANY mobile excavator you have made an investment in the future. Fast availability of spare parts is your guarantee of minimal downtimes and failure times.



Detailed information in black and white

Handbooks and documents are available for all SANY mobile excavators, and these can help you with operation, maintenance, servicing and repairs. These include operating and maintenance instructions and technical specifications.



# ENHANCED MOBILITY FOR YOUR PRODUCTIVITY

The SY155W demonstrates how strong performance can take to the road reliably and safely. The compact mobile excavator is an all-rounder boasting exemplary productivity. During civil engineering, horticulture and landscaping work and on urban construction sites, it proves itself to be a flexible workhorse anywhere, working not only with strength but also precision. The sensitive joystick control and the two-piece boom, as well as the well-coordinated brand-name components also have their part to play in this.

## ROBUST AND DURABLE

Robustness is essential for tough everyday conditions on the construction site. You can therefore put your trust in the **high quality** of all the components of the SY155W mobile excavator. And in **SANY's five-year warranty**.

## COMFORTABLE WORKSTATION

**Ergonomics and functionality** determine every detail of the SY155W's driver's cab. The perfect workstation to re-define productivity.

## COMPREHENSIVE PROTECTION

With the SY155W, you are investing in safety in every possible way. Besides the **ROPS/FOPS certification**, the comprehensive **safety package also includes support cylinders on the axes** and a **camera**.

## AGILE POWER

**Compact dimensions**, on the one hand, exemplary **mobility** and **flexibility** on the other. The **compact dimensions** and the **two-piece boom** make it possible.

## HIGH-QUALITY TRIED AND TESTED

The **true power** of a machine can only be seen in the sum of its components. This is why the SY155W features **tried and tested components** from leading manufacturers.

## ECONOMICALLY EFFICIENT

The SY155W pays for itself right from the first use, thanks to its **excellent price-performance ratio**, and beyond, due to its extremely **low energy consumption levels**. The intelligent hydraulic system, for example, ensures the highest possible **fuel efficiency**.

## TECHNICAL HIGHLIGHTS

|                   |                                               |
|-------------------|-----------------------------------------------|
| Engine            | DEUTZ TCD4.1 L4                               |
| Rated power       | 115 kW / 2 000 rpm                            |
| Max. torque       | 609 Nm / 1 600 rpm                            |
| Max. travel speed | 20 km/h                                       |
| Swingspeed        | 10.5 rpm                                      |
| Mainpump          | Variable-piston-pump with loadsensing control |
| Max. oilflow      | 250 l/min                                     |



**„A MACHINE WITH GOOD STANDING!“**

Nico Schwarze –  
machine operator, Straßen- und Tiefbau GmbH Eilenburg, Germany

Not all products are available in all markets. As part of our continuous improvement process, we reserve the right to modify specifications and designs without giving prior notice. The figures may contain additional options.

# SANY

Quality Changes the World

## SANY EUROPE GmbH

Sany Allee 1  
D-50181 Bedburg  
fon +49 2272 90531 100  
fax +49 2272 90531 109  
info@sanyeurope.com  
www.sanyeurope.com